

Xitech's Single-Well Controllers

Skimmer Controller Low Cost

The **2500ES Electronic Controller** is suited for controlling up to 2 Skimmers, provides intermittent skimming, has continuous electronic monitoring of the high level tank shutoff sensor, displays total run time of system, and operates on a DC or AC power source. The electronic high level shutoff assembly has a three way product sample valve, double containment fitting for the product line, and includes a high tank shutoff assembly.



Model 2500ES Controller

Pumping times in minutes: 1, 3, 5, 10, 20, 30, 60, continuous
 Pumping cycles per day: 1, 3, 6, 12, 24, 48
 Pumping cycles beyond a day:
 2 days, 3 days, 4 days, 5 days,
 6 days, 7 days


Skimmer Status Light Displays:
 RED is tank full
 GREEN is waiting to run
 BLINKING GREEN is running

Elapsed pumping time in hours and minutes

Power: 12 volt DC & 110 AC or 12 volt DC & 220 AC
 Maximum air pressure: 125 PSI
 Size: 8 inches x 6 inches x 4 inches
 outdoor enclosure
 Weight: 6 pounds

Skimmer Controller Explosion Proof

The **2550ES Explosion Proof Controller** has similar features to the 2500ES and can be installed in all hazardous areas. The **2550ES** uses only UL approved devices and is rated to be operated in all Class I, Division 1 areas. This controller can operate up to 2 skimmers, has continuous electronic monitoring of the high level tank shutoff switch, and provides intermittent pumping control for the ADJ Skimmers. The 2550ES can be operated with AC or DC power.

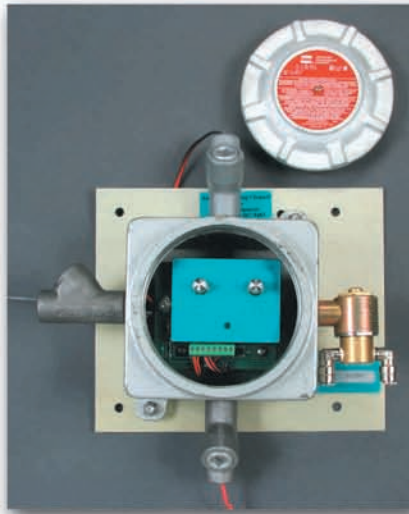

Model 2550ES Controller

Rated for Class I, Div 1 areas
 Pumping times in minutes: 1, 3, 5, 10, 20, 30, 60, continuous
 Pumping cycles per day: 1, 3, 6, 12, 24, 48
 Pumping cycles beyond a day:
 2 days, 3 days, 4 days, 5 days,
 6 days, 7 days

Skimmer Status Light Displays:
 RED is tank full
 GREEN is waiting to run
 BLINKING GREEN is running

Power: 12 volt DC, 110 AC, or 220 AC
 Maximum air pressure: 125 PSI
 Size: 8 inches x 8 inches x 6 inches
 Weight: 38 pounds

toll free
888-867-9483

Skimmer Controller Programmable

The **3000ES Programmable Timer** brings absolute operating control over any Xitech skimmer. This skimmer controller is an excellent choice for remote solar powered operations due to its ability to be programmed for day-time operations. The **3000ES** software is very user friendly and fast to program. The interval programming software enables users to select up to 24 start times in a day, up to 99 minutes of run time for each start time, and up to 30 days delay for one interval. The **3000ES** also keeps track of total run time of the skimmer, includes a manual operation choice for easy direct control of the skimmer, and includes a high tank shutoff assembly.



Model 3000ES Controller

Programmable intermittent control: 24 start times with up to 99 minutes of run time
 30 Days delay for one interval
 Visual indicator displays tank full condition
 Battery backed program memory
 Power: 12 volt DC & 110 AC or 12 volt DC & 220 AC
 Maximum air pressure: 125 PSI
 Outdoor enclosure
 Size: 8 inches x 6 inches x 4 inches
 Weight: 6 pounds

www.xitechinc.com