


Xitech's Skimmer Control Stations

Single Skimmer Control Station

The Xitech 2510ES Skimmer Control Station is a weather-proof lockable JOBOX® that contains a Xitech 2500ES Skimmer Controller for operating the Xitech skimmer intermittently, a high performance oil-less air compressor to power a Xitech skimmer up to 200 feet deep, and no maintenance air dryer. This product eliminates the need

for an equipment shed and several component air compressor system. The 2510ES also includes a high level shutoff assembly for turning off the skimmer when the holding tank is full. The 2510ES has lots of storage space for tools and accessories and an easy power connection.

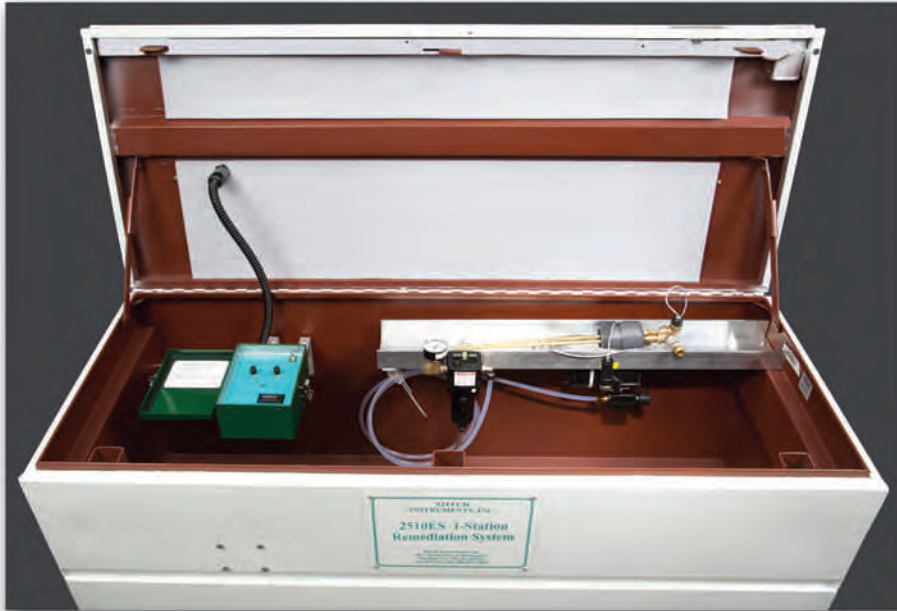

Model 2510ES Control Station

Pumping times in minutes: 1, 3, 5, 10, 20, 30, 60, continuous

Pumping cycles per day: 1, 3, 6, 12, 24, 48

Pumping cycles beyond a day: 2 days, 3 days, 4 days, 5 days, 6 days, 7 days

Skimmer Status Light Displays:

RED is tank full

GREEN is waiting to run

BLINKING GREEN is running

Elapsed pumping time in hours and minutes

On-board air compressor and dryer:

Pumping limit: 1 skimmer at a time

Membrane air dryer: Dries down to -32°

Maximum operating depth: 200 feet

Power Requirements: 5amps @ 110 volts AC

Enclosure Size: 24 inches wide, 28 inches high, 60 inches long, metal job box

Weight: 200 lbs

8 Skimmer Control Station

The Xitech 5010ES Skimmer Control Station provides control and operation of up to 8 Xitech Smart Skimmers or Pumps without the use of a building. The 5010ES consists of a portable lockable weather-proof JOBOX®, an 8-station programmable controller, air compressor, and air dryer.

The 8-Station Controller provides intermittent control for up to 8 skimmers or pumps. The 5010ES also includes one high-tank shutoff assembly. The air compressor can operate a skimmer or pump up to 200 feet deep.

Model 5010ES 8 Skimmer Control Station

Pumping times in minutes: 1 - 99

Pumping cycles per day: 1 - 99

Pumping cycles beyond a day: 1 - 99 days

8 individual programmable outputs for intermittent control of skimmer

Digital recording of elapsed pumping time

Battery-backed program memory

Visual indicator displays tank full condition

On-board air compressor and dryer:

Pumping limit: 1 skimmer at a time

Membrane air dryer: Dries down to -32°

Maximum operating depth: 200 feet

Power requirements: 5 amps @ 110 volts AC

Enclosure: 24 inches wide, 28 inches high, 60 inches long, metal job box

Weight: 200 pounds



xitechinc.com

toll free 888-867-9483